



SFF

25/50/75

Stationary ventilator unit for in-duct mounting.

APPLICATIONS

The SFF is **is intended** to be used for the following applications:

- in-duct gas filter for inlet, outlet or recirculation of air (e.g. commercial buildings, process industry)
- ventilator commercial kitchens



Do **not** use the SFF for the following applications or in the following circumstances:


- solids and liquids
- explosive, burning and aggressive substances / gases



SPECIFICATIONS

	SFF-25	SFF-50	SFF-75
Physical dimensions and properties			
Height	630 mm	630 mm	630 mm
Width	450 mm	900 mm	1350 mm
Depth	660 mm	660 mm	660 mm
Weight (net)	kg	kg	kg
Material housing	epoxy coated steel		
Colour	grey RAL 7035		
Fan			
Ø	1 x 250 mm	2 x 250 mm	2 x 300 mm
Recommended max. output	3000 m ³ /h	6000 m ³ /h	8000 m ³ /h
Ambient conditions			
Max. operating temperature	80°C		
Max. relative humidity	70%		
Outdoor use allowed	no		
Storage conditions	<ul style="list-style-type: none"> • 5 - 50°C • relative humidity max. 80% 		
Scope of supply			
<ul style="list-style-type: none"> • Unit housing incl. fan • Manual 			

	SFF-25	SFF-50	SFF-75
Order information			
Article number			
Airflow left-right	5160382120	5160382140	5160382160
Airflow right-left	5160382130	5160382150	5160382170
Housing / package	1		
Shipping data			
Gross weight (1 pc.)	kg	kg	kg
• Max. number / pallet	6	3	3
• Packing dimensions	80 x 130 x 210 cm	80 x 120 x 210 cm	80 x 160 x 210 cm
• Gross weight	kg	kg	kg
Harmonized Tariff Code	8421.39.2090		
Country of origin	Netherlands		

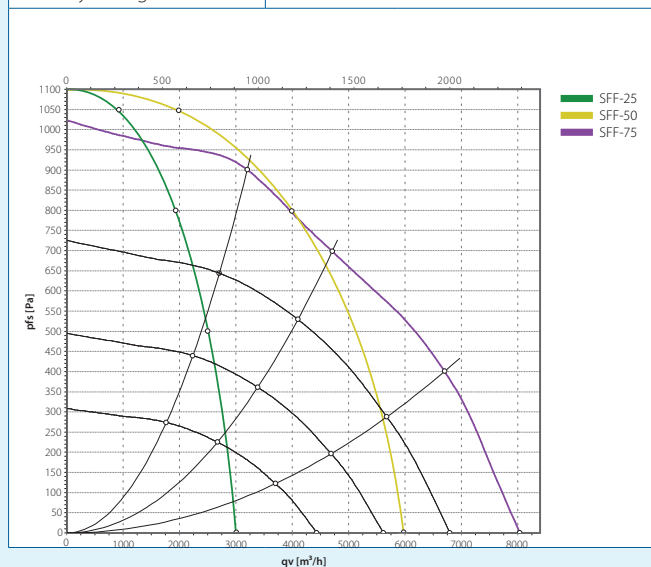

Product type	SFF-25/50/75
Product group	Stationary filter units
Version	06092018/0